

# ZXM6-H120 Series

ZNSHINE Solar 5BB **HALF-CELL**  
Mono PERC PV Module



120

**Mono** Poly Solutions

**315W | 320W | 325W | 330W | 335W | 340W**



Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-H120 monocrystalline modules by ZNSHINE SOLAR (power output 315 up to 340Wp), represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-H120 monocrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

**12 years product warranty for general application**

**15 years product warranty for Rooftop PV system**

**25 years output warranty / 0.55% linear degradation p.a.**

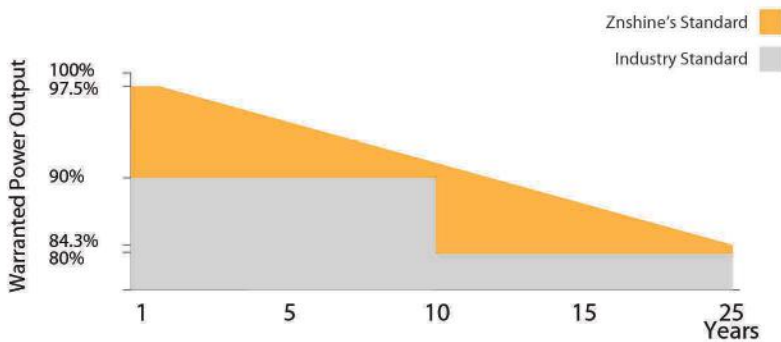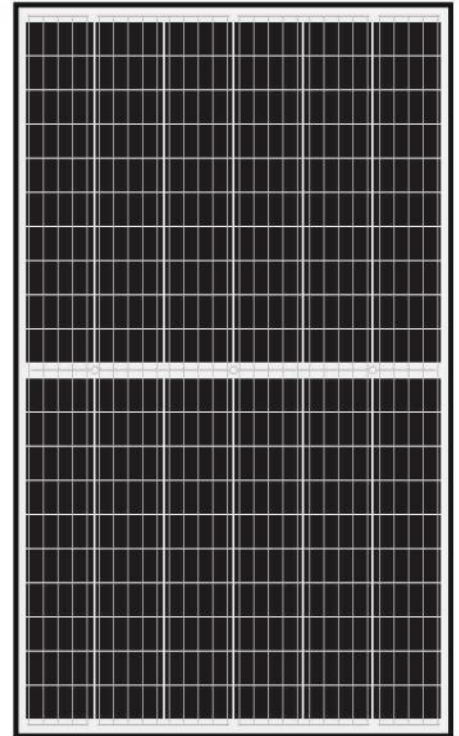

 <p><b>Tier 1 &amp; Bankable</b> BNEF Tier 1 Manufacturer and Global Bankable modules</p>	 <p><b>Enhanced Warranty</b> 15 years product warranty for rooftop mounted PV system</p>
 <p><b>Easy to install</b> The module is very light in weight so the installation is easier and transport costs are lower</p>	 <p><b>Better Weak Illumination Response</b> Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings</p>
 <p><b>Certified to withstand the most challenging environmental conditions</b> 3600 Pa snow load (with safety factor 1.5) 2400 Pa wind load (with safety factor 1.5)</p>	 <p><b>Anti PID</b> Minimum power degradation caused by PID effect is guaranteed</p>



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

## ELECTRICAL PROPERTIES | STC\*

Module Type	ZXM6-H120-315/M	ZXM6-H120-320/M	ZXM6-H120-325/M	ZXM6-H120-330/M	ZXM6-H120-335/M	ZXM6-H120-340/M
Nominal Power Watt Pmax(W)	315	320	325	330	335	340
Power Output Tolerance Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3
Maximum Power Voltage Vmp(V)	33.2	33.4	33.6	33.8	34.0	34.2
Maximum Power Current Imp(A)	9.49	9.59	9.68	9.77	9.86	9.95
Open Circuit Voltage Voc(V)	40.0	40.2	40.4	40.6	40.8	41.0
Short Circuit Current Isc(A)	10.00	10.10	10.20	10.30	10.40	10.50
Module Efficiency (%)	18.54	18.83	19.12	19.42	19.71	20.01

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL PROPERTIES | NOCT\*

Maximum Power Pmax(Wp)	233.5	237.3	240.8	244.5	248.2	251.9
Maximum Power Voltage Vmpp(V)	30.7	30.9	31.1	31.2	31.4	31.6
Maximum Power Current Impp(A)	7.61	7.68	7.75	7.83	7.90	7.98
Open Circuit Voltage Voc(V)	37.1	37.3	37.5	37.7	37.8	38.0
Short Circuit Current Isc(A)	8.08	8.16	8.24	8.32	8.40	8.48

\*NOCT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	45°C ±2°C
Temperature coefficient of Pmax	-0.37%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

## MECHANICAL DATA

Solar cells	Mono 158.75×79.375 mm
Cells orientation	120 (6×20)
Module dimension	1696×1002×35 mm
Weight	20.5 kg
Glass	High transparency, low iron, tempered Glass 3.2 mm (AR-coating)
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm <sup>2</sup>
Connectors	LJQ-1 Taizhou Jinxiu Electrical Science & Technology Co Ltd


## WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	15 A
Maximum load (snow/wind)	3600/2400 (with safety factor 1.5)

## PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	30
Piece/Container	840

## DIMENSION OF THE PV MODULE (mm)

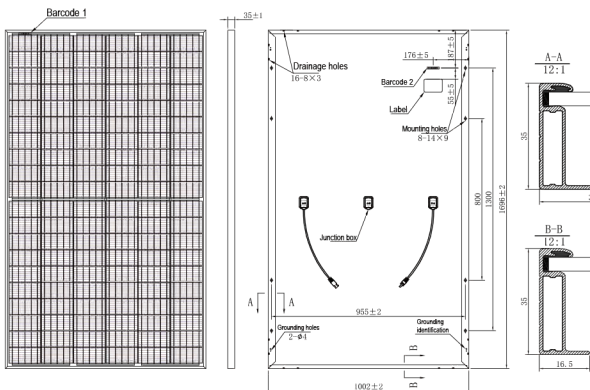

## I-V CURVES OF THE PV MODULE

